

FLEX CLASSIC FLUO


For application onto cotton and polyester

With an adhesive carrier

FLEX CLASSIC FLUO film is manufactured with a fluorescent neon coating. The film can handle small lettering and fine detail. It is a hot peel product for speed after heat application.

FILM COMPOSITION	PU/COPEs	25m ROLLS
FILM THICKNESS	100 MICRONS	
CARRIER COATING	POLYESTER FLUO	BLADE
MINIMUM SIZE OF CUT OFFSET	0.5 mm 0.42 mm / 0.47mm	
PRESS TEMPERATURE	150°C	WASH
PRESS TIME	12 SECONDS	
CARRIER REMOVAL	HOT	

COLOURS AVAILABLE

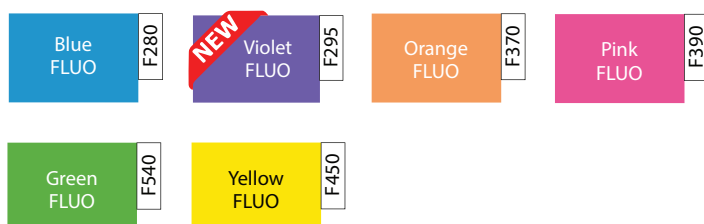

SUGGESTIONS

We suggest after removing the carrier, to cover the design and re-press for 2-5 seconds. This can improve the feel and texture of the vinyl on the garment.

PLEASE NOTE

The technical data above are the results of our laboratory tests. We always recommend a small trial test of each product before production. We also recommend not to stock the materials in damp or high temperature rooms.